


	First glazing	Second glazing
Gas		Argon 90% 18.00mm
Coating		PLANITHERM TOTAL+
First glass	PLANILUX 4.00mm	PLANICLEAR 3.00mm
Coating		
Layer		PVB standard 0.38 mm
Coating		
Second glass		PLANICLEAR 3.00mm
Coating		



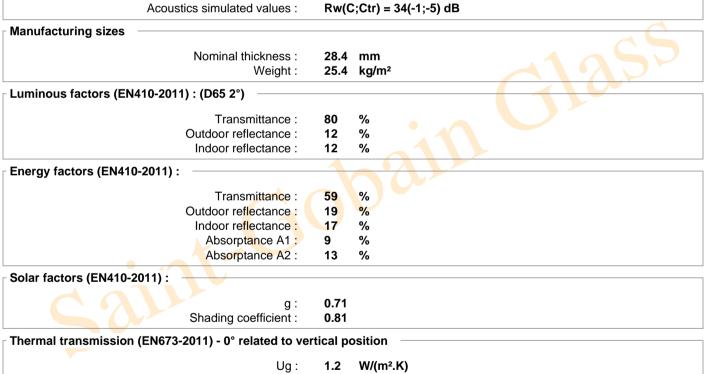

Steve Massey Regency Glass Ltd Sales Butts Street WN7 3AE

01942 262162 07970 137136 01942 261555

Calumen'll

Phone : Mobile : Fax : stevemassey@regencyglass.co.uk



 Calculation set verified
EN 410 and EN 673

These values are calculated according to EN410-2011 and EN673-2011 standards. Tolerances are defined according to EN 1096-4 or ISO9050-2003 standards. Nevertheless, user Functional the feasibility of the associated products, in particular in terms of thickness and colour. Furthermore, it is his responsibility to check that the resulting combination of glazing meets regulatory requirements at national, local or regional level. Computed values with NFRC-2010 standards are indicative. Please use NFRC certified software for certified values.

CALUMEN® II is a simulation software to calculate key performance of glass such as light transmission, solar factor or thermal insulation coefficient. Computed values are indicative and subject to change. They can not be used to guarantee performance of the products.

Leigh

Calculation rules and functional output of Calumen II have been validated by TÜV Rheinland Quality Report 11923R-11-33705